



HERKULES LIFTING BY HEDSON

Herkules HLS 1200


The lifting and lowering of the working height is done safely and smoothly with a Herkules HLS 1200 by Hedson and increases the access to damaged areas and the ergonomic work process. This lift is available in three types for different demands - on-ground, flush mounted and rail transportation. The lifts are easy to install and facilitate an individual planning of body shops by using the existing space optimally. Due to the low construction height, it is easy to drive the vehicles onto the lift. The work efficiency is increased and the quality is improved by better visual control opportunities due to the easy lifting.

- 2,5 tons lifting capacity
- Wheel supported
- Simple access to interim drive over ramps and deviate loading ramps
- On-ground, flush mounted or rail transport installations



HIGH CAPACITY

The lifting and lowering of the working height is done safely and smoothly with a Herkules HLS 1200 by Hedson and increases the access to damaged areas and the ergonomic work process with loading capacity up to 2,5 tons

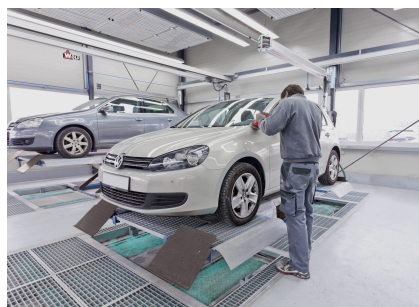

SPACE SAVINGS

This lift is available in three types for different demands - on-ground, flush mounted and rail transportation. The lifts are easy to install and facilitate an individual planning of body shops by using the existing space optimally



ERGONOMIC

Due to the low construction height, it is easy to drive the vehicles onto the lift. The work efficiency is increased and the quality is improved by better visual control opportunities due to the easy lifting

TECHNICAL SPECIFICATION

HERKULES HLS 1200

Herkules HLS 1200 - 11	Part.no. HLS 1200-11
Herkules HLS 1200 - 14	Part.no. HLS 1200-14
Herkules HLS 1200 - 16	Part.no. HLS 1200-16
Herkules HLS 1200 - 17	Part.no. HLS 1200-17
Weight	750 kg
Lifting height	930 mm
Loading capacity	2,5 tons
Air supply	6 bar
Working height -11, -17	~ 1100 mm
Working height -14, -16	~ 1000 mm
Object height only -11, -17	110 mm
Pit depth -14, -16	115 mm
Installation -11	On-ground
Installation -14	Flush mounted
Installation -16	Flush mounted with CE-stop
Installation -17	Transmobile

ACCESSORIES

Pit frame (grids), zinc coated	Part.no. 300-304
Pit frame (concrete), zinc coated	Part.no. 300-307
Additional grids for the front end of HLS 1200, 2 pcs., incl. support angles + fasteners	Part.no. 300-344
Drive over ramps, 2 pcs.	Part.no. 300-430